



Optima

Recommended
daily production
up to 400 cups




Drink	Cups per hour*
Espresso	240
Coffee/Cappuccino	200
Choco	120
Hot water	tot. 60 litres


* the number of cups per hour may vary depending on
drink size and setting



MODELS

PLATINUM
(TFT Graphic Display)Coffee
Fresh Milk

1 grinder



2 grinders

SOFT
(RGB Display)Coffee
Fresh Milk

1 grinder



2 grinders

TECHNICAL DATA

Coffee hopper capacity	1.3 Kg
Coffee boiler capacity	1.0 l
Steam boiler capacity	1.8 l
Delivery spout range	94 - 194 mm
Coffee ground bin capacity	60 pcs
Net weight	Platinum/Soft: 48 Kg
Gross weight	Platinum/Soft: 58 Kg
Matching add-on units	Range A02

COLOURS


Front panel: white - Side and rear panels: white



Front panel: black - Side and rear panels: stainless steel



DIMENSIONS

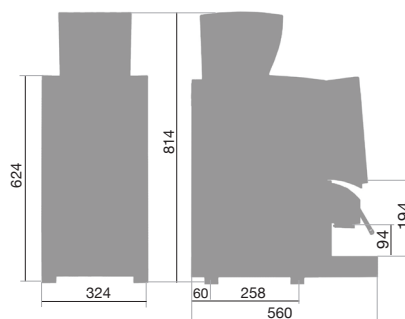

W 324 x D 560 x H 814 mm

VOLTAGE / TOTAL POWER

PLATINUM	SOFT
200V 1+N 50/60Hz 3.774W	200V 1+N 50/60Hz 3.754W
200V 3~ 50/60Hz 4.461W	230V 1+N 50/60Hz 4.400W
230V 1+N 50/60Hz 4.400W	230V 3~ 50/60Hz 5.900W
230V 3~ 50/60Hz 5.900W	240V 1+N 50/60Hz 4.791W
240V 1+N 50/60Hz 4.791W	400V 3+N 50/60Hz 5.900W
400V 3+N 50/60Hz 5.900W	

TECHNOLOGIES



OPTION

MTT Milk Pump to set the desired temperature for each milk-based drink and get a perfect foam	Hopper Lock to close the hoppers with a lock
MaxSave (Platinum only) to detect the presence/absence of users to reduce energy consumption	Direct Coffee Ground Discharge to discharge coffee grounds directly into a bin placed under the machine
Barista Steam Wand (Platinum only) to heat and froth milk automatically at any desired temperature	Card Reader contactless transponder to read smart cards
Cup Sensor (Platinum only) to enable the drink selection corresponding to the cup size, recommended in self serve applications	GSM System telemetry system to check machine data and revenues, as well as update machine parameters via remote control
Cup Positioning to place cups right under the delivery spout	Coin Box RM5 coin box for self serve payments programmable for any currency, no change giver